









Philips Ledalite Linear LED Luminaires

Limit of 500 linear ft per release



	FloatPlane (24)	BoldPlay (78)	Sync (74)	Verge (76)	Chopstick (75)	TruGroove (29)	MicroSquare (MQ)	Jump (12)
Product Family								
Mounting	Curve & Edge Suspended	Suspended	Suspended	Suspended	Suspended	Suspended/Surface	Suspended/Surface	Suspended/Surface
Color Temp	3000K, 3500K and 4000K							
Lumen Package	All lumen packages available (varies by product)							
Distribution	Direct/Indirect	Direct/Indirect	Direct/Indirect	Direct/Indirect	Semi-Indirect	Direct, Indirect, Direct/Indirect	Direct, Indirect, Direct/Indirect	Direct
Wiring Configurations*	1cct Non-Dimming or Dimming (0-10V) Available Options: Emergency (EM wiring) or Battery Pack							
End Caps (Default)	Sculpted		Flat	Sculpted		Flat	Sculpted	

* Note: Not all wiring configurations are available with all LED light source options. White & titanium finishes only. Standard downlight kits available.
Questions? CS.ledalite@philips.com

- Exclusions:**
- Response sensors & Actilume day/occupancy sensors
 - No Battery Pack is available for MicroSquare OR 347V
 - Wall mount
 - All non-standard, 3rd party drivers and components
 - Thru-wiring for additional circuits
 - Tunable White
 - Prior **Hold for Release** or **Do Not Ship Before** orders








Please note: Due to continuing product improvements, Philips Ledalite reserves the right to change product specifications without notice.

Information current from October, 2016 - Check www.ledalite.com for ongoing updates.

Philips Ledalite Recessed LED Luminaires

Limit of 100 units per release

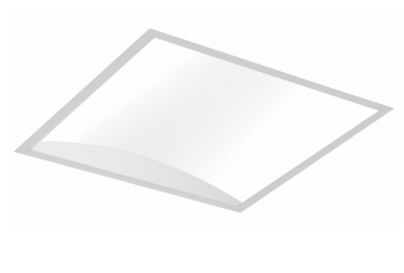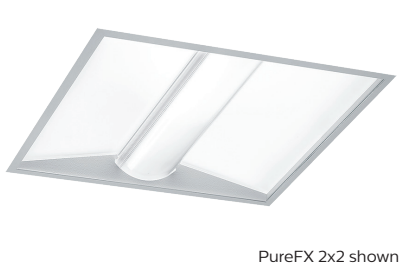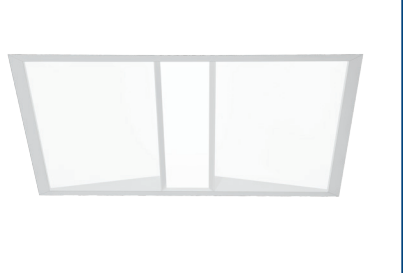

	SilkSpace (42)	VersaForm (41)	ArcForm (36)	PureFX (94), Vectra (97)	Shine (33)
Product Family				 <small>PureFX 2x2 shown</small>	
Size	1x4, 2x2, 2x4	1x4, 2x2, 2x4	1x4 & 2x2	1x4 & 2x2	20" x 2', 20" x 4', 600 x 1200mm 600 x 600mm

Color Temp 3000K, 3500K and 4000K

Lumen Package All lumen packages available (varies by product)

Wiring Configurations* 1cct Non-Dimming or Dimming (0-10V) - Available Option: Battery Pack

Ceiling Type

Standard T-Grid **YES**

Slot/Tegular T-Grid **Not available for this product** **YES** **Not available for this product**

Drywall Kits **YES**

Options Pre-installed 6' Flex Whips

* Note: Not all wiring configurations are available with all light source options. Questions? CS.ledalite@philips.com

- Exclusions:**
- Chicago housings
 - Response sensors & Actilume day/occupancy sensors
 - No Battery Pack is available for 347V
 - Surface mount versions
 - All non-standard, 3rd party drivers and components
 - Tunable White & CRI 90
 - Prior **Hold for Release** or **Do Not Ship Before** orders




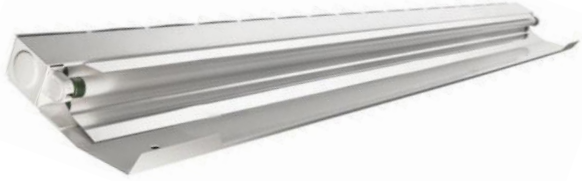
Please note: Due to continuing product improvements, Philips Ledalite reserves the right to change product specifications without notice.

Information current from October 2016 - Check www.ledalite.com for ongoing updates.

Philips Ledalite Slot, Cove & Perimeter Luminaires

Limit of 100 per release



	TruGroove LED (39)	InCove II (38)
Product Family		
Mounting	SLOT (Linear Recessed)	Cove
Distribution	Symmetric/Asymmetric	Asymmetric
Light Source		
LED	YES (3000K, 3500K & 4000K - all Lumen Pkgs available)	Not applicable
T5 (28W)	Not available on QuickShip	YES
T5HO (54W)		
T8 (32W)		
Module Lengths	Row lengths from 2' to 20' in 2' increments	T5 & T8 available in modules of 2', 3', 4', 6' & 8' lengths T5HO available in 4' & 8' lengths
Wiring Configurations*	1cct Non-Dimming or Dimming (0-10V) Available Options: Emergency (EM wiring) or Battery Pack	
	2cct: Not Available	2cct Non-Dimming Available Options: Emergency (EM wiring) or Battery Pack

* Note: Not all wiring configurations are available with all light source options. Questions? CS.ledalite@philips.com

- Exclusions:**
- Fluorescent lamps not supplied
 - Response sensors & Actilume day/occupancy sensors
 - Prior **Hold for Release** or **Do Not Ship Before** orders




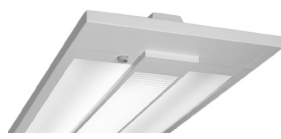





Please note: Due to continuing product improvements, Philips Ledalite reserves the right to change product specifications without notice.

Information current from October 2016 - Check www.ledalite.com for ongoing updates.

Philips Ledalite Linear Fluorescent Luminaires

Limit of 500 linear ft per release



	Jump (12)	Voice (73)	Chopstick (75)	Sync (74)	Sona (77)	Achieva (88)	Centris (95)
Product Family							
Mounting	Suspended/ Surface	Suspended/ Surface	Suspended	Suspended	Suspended	Suspended	Suspended
Distribution	Direct	Direct/Indirect	Semi-Indirect	Direct/Indirect	D/I White Louver, D/I Semi-Spec Louver, Semi-Indirect Round Perf	D/I White Louver D/I Semi-Spec Louver	Indirect, Semi-Indirect Round Perf, D/I Round Perf
Lamping							
T5 (28W)	YES					Not Available	Not Available
T5HO (54W)	YES						
T8 (32W)	YES	Not Available	YES				
Wiring Configurations*	1cct Non-Dimming or Dimming (0-10V) • Available Options: Emergency (EM wiring) or Battery Pack 2cct Non-Dimming • Available Options: Emergency (EM wiring) or Battery Pack						
End Caps (Default)	Sculpted		Flat		Sculpted		Flat

*Note: Not all wiring configurations are available with all light source options. Questions? CS.ledalite@philips.com

Note: White & titanium finishes only. Standard downlight kits available.

- Exclusions:**
- Response sensors & Actilume day/occupancy sensors
 - Wall Mount
 - Fluorescent lamps not supplied
 - T8 dimming not available for Chopstick & Sync
 - 347V by special request only
 - Prior **Hold for Release** or **Do Not Ship Before** orders






Please note: Due to continuing product improvements, Philips Ledalite reserves the right to change product specifications without notice.

Information current from October 2016 - Check www.ledalite.com for ongoing updates.

Philips Ledalite Recessed Fluorescent Luminaires

Limit of 100 units per release



PureFX (94), Vectra (97), Shine(33) <i>(PureFX image shown)</i>			
Product Family			
Size	1x4	2x2	2x4
Lamping			
T5 (14W, 28W)	1 or 2	2 or 3	2 or 3
T5HO (24W, 54W)		NO	1 or 2
T8 (17W, 32W)		2 or 3	2 or 3
TT5 (25W, 40W, 55W)	Not Available	1 or 2	Not Available
Wiring Configurations*	1cct Non-Dimming or Dimming (0-10V) • Available Option: Battery Pack 2cct Non-Dimming • Available Option: Battery Pack		
Ceiling Type			
Standard T-Grid	YES		
Slot/Tegular T-Grid	YES (except Shine)		
Drywall Kits	YES		
Options	Pre-installed 6' Flex Whips		

* Note: Not all wiring configurations are available with all light source options. Questions? CS.ledalite@philips.com

- Exclusions:**
- Fluorescent lamps not supplied
 - Chicago housings
 - Response sensors & Actilume day/occupancy sensors
 - Surface mount versions
 - All non-standard, 3rd party ballast, drivers and components - 347V by special request only
 - Thru-wiring for additional circuits
 - Prior **Hold for Release** or **Do Not Ship Before** orders



Please note: Due to continuing product improvements, Philips Ledalite reserves the right to change product specifications without notice.

Information current from October 2016 - Check www.ledalite.com for ongoing updates.